

OXIDICE ICE MACHINE DISINFECTION

System Part Numbers:

CD385A CD390C
CD390A CD390D
CD390B



System Description

The **Pentair Everpure Oxidice Ice Machine Disinfection System** is a compact ozone generator that treats the inside of your ice machine. It helps reduce the growth of bacteria, molds, yeast, and other contaminants by treating the air, water, and surfaces within the ice machine without leaving any residues or off-tastes. Especially effective in cube ice machines, it extends the time between maintenance and cleaning, fits any sized ice machine, and is quick and easy to install. Oxidice is certified under NS, UL, CE, and UKCA.

Applications

- ◆ Grocery Stores
- ◆ Restaurants
- ◆ Hospitality
- ◆ Breweries
- ◆ Bakeries
- ◆ Schools

Features • Benefits

- ◆ Variable ozone output
- ◆ LED status indicators
- ◆ Fast and simple installation
- ◆ Fits most ice machines
- ◆ Microprocessor controlled
- ◆ Unique application method that treats the water, air, and internal surfaces
- ◆ Universal power supply
- ◆ Automated service timer
- ◆ No chemicals - nothing to fill or recharge
- ◆ Only by-product is oxygen*
- ◆ 6' (1.8 m) grounded power cord

Installation Tips

- ◆ Prior to installation, clean ice maker thoroughly.
- ◆ The system should be mounted horizontally and no further than 10 ft. from the ice machine.
- ◆ Do not install the system in an area where water may freeze.
- ◆ Once installed, the system is ready to use.
- ◆ LED lights will blink indicating that ozone is flowing through the system.

Includes

- ◆ Oxidice unit
- ◆ Z-bar mount
- ◆ 10 ft. tube
- ◆ Rubber grommet
- ◆ Diffuser
- ◆ Installation and operation manual
- ◆ Country-specific power cord


*Any ozone that does not react with another compound will break down to oxygen. In water, half of the unused ozone will revert back to oxygen in 20 minutes at 68°F (20°C). In air, half of the unused ozone will revert back to oxygen in three (3) days at 68°F (20°C).

EPA No. 067203-CA-001


OXIDICE

CD385A, CD390A, CD390B, CD390C, CD390D

Z-Bar Mounting System

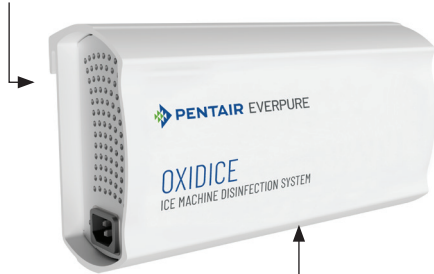

Extruded Aluminum Cover

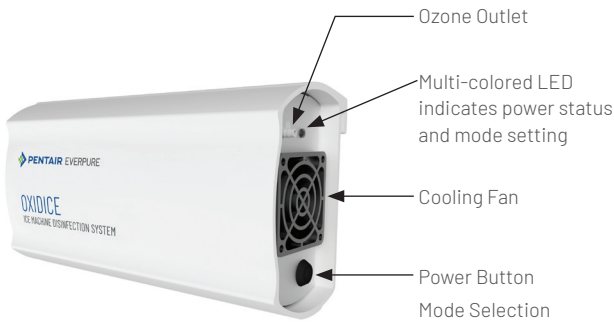

The Oxidice system can be used with most ice machines. The ozone production time can be increased or decreased based on the ice maker's production rate within a 24-hour period, and the environment in which the ice maker is used.

The table (right) assists with setting the proper level of the Oxidice system for optimal results. Note: Each mode has a distinct color, and the light will also blink the corresponding mode number.

For Pentair Everpure Product Warranties in North America visit:

<http://pentair.com/assets/foodservice-warranty>

In other regions, please refer to standard terms and conditions.

The contaminants or other substances removed or reduced by this system are not necessarily in your water.

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.

Specifications

System

Overall Dimensions
5.59" H x 10.0" W x 3.6" D
(14.2 cm x 25.4 cm x 9.14 cm)

Connections

Outlet: 3/16" (4.76 mm) barb

Ambient Requirements

32°- 95°F; (0°- 35°C)
10 - 75% RH non-condensing

Shipping Weight

3.5 lbs (1.59 kgs)

System

Electrical Connection

90-265VAC, 50-60HZ, 0.38-0.17A

CD385A - Oxidice 120V US/Can

CD390A - Oxidice EU

CD390B - Oxidice UK/SA

CD390C - Oxidice AUS/NZ

CD390D - Oxidice 240V US/Can

Performance

Ozone Output

150 mg/hr @ 2.0 SCFH (56.6 L/h)
on ambient air

Air Flow

0.5-2.0 SCFH, (14-56.6 L/h),
back pressure 2 psi (13.8 kpa)
max

Mode Selection

Light Color	Number of Blinks	24 Hour Ice Yield, Normal Environment	24 Hour Ice Yield, Extreme Environment*	Air Flow (SCFH)	Repeating Run Time (minutes)
Off			Off		
Yellow	1	<400 lbs (<182 kgs)	N/A	0.5 (14 L/h)	1 on / 9 off
Green	3	400 - 600 lbs (182-273 kgs)	<400 lbs (<182 kgs)	1.0 (28.3 L/h)	2 on / 8 off
Blue	4	600 - 1,000 lbs (278-455 kgs)	400 - 600 lbs (<183-273)	1.5 (42 L/h)	4 on / 6 off
Purple	4	>1,000 lbs (>455 kgs)	>600 lbs (>273 kgs)	2.0 (56.6 L/h)	7 on / 3 off
Red		Service Required			

*Examples of extreme environments include bakeries and microbreweries.



Pentair Offices in South East Asia

Singapore

390 Havelock Road
#04-01 King's Centre
Singapore 169662
Tel: +6567685900

Thailand

16th Floor, The Ninth Towers
Grand RAMA 9, Tower B
33/4 Rama 9 Road, Huaykwang
Bangkok 10310, Thailand
Tel: +6621681092

Philippines

5th Floor MAIA Suites
1747 Nicanor Garcia Street corner
D.Oliman Street Makati City, Philippines
Tel: +632824 3825

All Pentair trademarks and logos are owned by Pentair. All other brands or product names are trademarks or registered marks of their respective owners.

Because we are continuously improving our products and services. Pentair reserves the right to change specifications without prior notice.

Pentair is an equal opportunity employer.

©2022 Pentair. All Rights Reserved.