

## EVERPURE 7FT FILTER CARTRIDGE

### High Performance Filter Cartridge for Everpure FT Series



7FT Replacement Cartridge (1 PK): SA21057

#### Applications

- ◆ Coffee, Bubble Tea, Restaurants

#### Features • Benefits

- ◆ Suitable for applications with relatively complex and challenging water quality.
- ◆ Activated carbon fibre filter cartridge, with large surface area, high dirt holding capacity and minimal pressure drop.
- ◆ Effectively removes chlorine, taste & odour.
- ◆ High flow rate and capacity, longer lifespan, lower operation and maintenance costs.

#### Installation tips

- ◆ Install vertically so cartridge hangs down
- ◆ Allow at least 64mm clearance below the cartridge for easy cartridge replacement and system maintenance
- ◆ Resume inlet water supply and flush the whole filtration system for at least 5 minutes after a filter cartridge is installed or replaced

#### Operation tips


- ◆ Recommended service life of the cartridge: 6 - 12 months
- ◆ The service life is a recommended replacement cycle, and the actual lifespan of a cartridge may vary in accordance with the actual water consumption and local tap water quality
- ◆ Change a cartridge when its capacity is reached or when pressure falls below 10psi (0.7bar)
- ◆ Always flush the filter cartridge at time of installation and cartridge change

#### Sizing

- ◆ Flow rate<sup>1</sup>: 2.5 gpm (9.5 Lpm)
- ◆ Rated capacity<sup>1</sup>: 30,000 gallons (113,562 L)

<sup>1</sup> Tested in Pentair lab and verified by third party lab

# EVERPURE 7FT FILTER CARTRIDGE SA21057

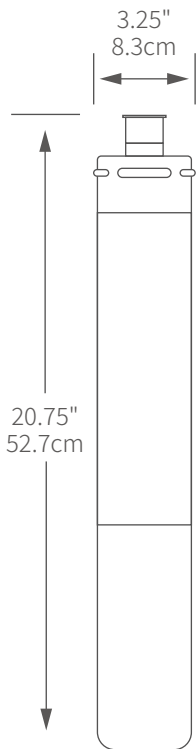

## Specifications

- ◆ **Flow rate<sup>1</sup>**  
2.5 gpm (9.5 Lpm)
- ◆ **Rated capacity<sup>1</sup>**  
30,000 gallons (113,562 L)
- ◆ **Working pressure**  
20.3~50.7psi, non-shock (1.4~3.5 bar)
- ◆ **Temperature**  
35~100°F (2~38°C)
- ◆ **Overall dimension**  
20.75"H\*3.25"D (52.7cm\*8.3cm)

## Note

- ◆ Do not use with microbiologically unsafe or of unknown quality water without adequate disinfection before or after the filtration system/ cartridge.
- ◆ After stopping the filtration for 48 hours, it is recommended to flush for 30mins before use.



## Pentair Offices in South East Asia

### Singapore

390 Havelock Road  
#04-01 King's Centre  
Singapore 169662  
Tel: +6567685900

### Thailand

16th Floor, The Ninth Towers  
Grand RAMA 9, Tower B  
33/4 Rama 9 Road, Huaykwang  
Bangkok 10310, Thailand  
Tel: +6621681092

### Philippines

5th Floor MAIA Suites  
1747 Nicanor Garcia Street corner  
D.Oliman Street Makati City, Philippines  
Tel: +632824 3825

All Pentair trademarks and logos are owned by Pentair. All other brands or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services. Pentair reserves the right to change specifications without prior notice.

Pentair is an equal opportunity employer.

©2022 Pentair. All Rights Reserved.